


Codo R.L. 90°.

ANSI B-16.9

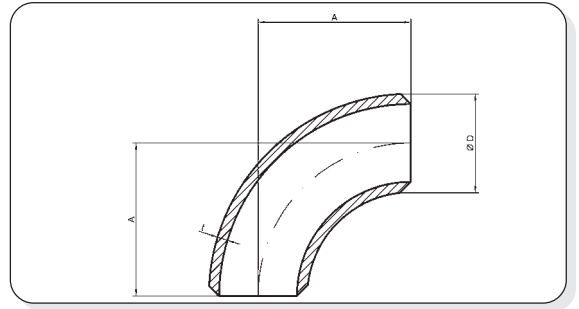

NPS	Ø ext.-mm	Centro a Extremo A-mm	SCH 10	SCH 20	SCH 30	STD	SCH 40	SCH 60	XS	SCH 80	SCH 100	SCH 120	SCH 140	SCH 160	X.X.S
			t (mm) masa (Kg)												
½"	21	38			2.41	2.77 0.08			3.73 0.18					4.78 0.22	7.47
¾"	27	38 (1)			2.41	2.87 0.08			3.91 0.20					5.56 0.25	7.82
1"	33	38			2.90	3.38 0.15			4.55 0.20					6.35 0.30	9.09 0.40
1¼"	42	48			2.97	3.56 0.25			4.85 0.35					6.35 0.44	9.70 0.61
1½"	48	57			3.18	3.68 0.36			5.08 0.60					7.13 0.80	10.16 0.90
2"	60	76			3.18	3.91 0.65			5.54 0.94					8.74 1.50	11.07 1.80
2½"	73	95			4.78	5.16 1.28			7.01 1.70					9.52 2.35	14.02 3.21
3"	89	114			4.78	5.49 2.03			7.62 2.75					11.13 4.00	15.24 5.20
3½"	102	133			4.78	5.74 2.87			8.08 3.95						
4"	114	152			4.78	6.02 3.90			8.56 5.40		11.13 6.95			13.50 9.00	17.12 10.30
5"	141	190				6.55 6.50			9.52 8.85		12.70 12.62			15.87 15.44	19.05 18.11
6"	168	229				7.11 10.20			10.97 15.35		14.27 23.00			18.26 27.00	21.95 30.00
8"	219	305		6.35 16.57	7.03 17.50	8.18 20.30		10.31 26.30	12.70 29.90	15.09 38.00	18.26 40.50	20.62 52.00	23.01 58.00	25.01 62.50	22.23 54.50
10"	273	381		6.35 25.79	7.80 31.30	9.27 37.00		Utilizar X.S.	12.70 48.60	15.09 57.11	18.26 75.00	21.44 85.00	25.40 97.00	28.57 123.00	25.40 97.00
12"	324	457		6.35 37.23	8.38 46.06	9.52 54.00	10.31 58.15	14.27 82.62	17.48 70.00	21.44 94.82	25.40 123.00	28.57 140.00	33.32 157.00	35.71 180.00	25.40 140.00
14"	356	533		6.35 57.47	7.92 59.93	Utilizar STD	9.52 68.00	11.13 79.96	15.09 111.26	12.70 94.35	19.05 132.16	23.83 188.00	27.79 190.00	31.75 224.00	35.71 247.50
16"	406	610		6.35 63.20	7.92 78.09	9.52 89.20	Utilizar X.S.	16.66 161.17	12.70 124.75	21.44 204.30	26.19 260.00	30.96 274.00	36.53 323.00	40.49 367.00	
18"	457	686		6.35 82.00	7.92 99.43	11.13 139.83	9.52 112.90	14.27 177.06	19.05 231.54	12.70 157.50	23.83 287.84	29.36 390.00	34.93 405.00	39.67 422.00	45.24 545.00
20"	508	762		6.35 100.00	12.70 194.30	9.52 142.20	15.09 230.00	20.62 311.44	12.70 194.30	26.18 390.90	32.54 476.00	38.10 508.00	44.45 607.00	50.01 770.00	
22"	559	838		6.35 120.00	Utilizar STD	12.70 250.20	9.52 178.00		22.22 412.70	12.70 236.00	28.58 523.40	34.92 638.00	41.27 700.00	47.62 850.00	53.97 1020.00
24"	610	914		6.35 146.00	14.27 318.70	9.52 202.00	17.48 384.00	24.61 533.90	12.70 268.50	30.96 667.40	38.89 820.00	46.02 954.00	52.37 1100.00	59.54 1270.00	
26"	660	991		7.92 208.00		9.52 270.00			12.70 348.00						
28"	711	1067		7.92 242.00		15.88 478.00	9.52 300.00		12.70 404.00						
30"	762	1143		7.92 278.00		15.88 550.00	9.52 333.00		12.70 441.00						
32"	813	1219		7.92 316.00		15.88 627.00	9.52 390.00	17.48 689.00	12.70 510.00						
34"	864	1295		7.92 357.00		15.88 708.00	9.52 430.00	17.48 778.00	12.70 560.00						
36"	914	1372		7.92 400.00		15.88 795.00	9.52 482.00	19.05 951.00	12.70 625.00						
38"	965	1448				9.52 540.00			12.70 710.00						
40"	1016	1524				9.52 580.00			12.70 745.00						
42"	1067	1600				9.52 655.00			12.70 840.00						
44"	1118	1676				9.52 726.00			12.70 970.00						
46"	1168	1753				9.52 816.00			12.70 1055.00						
48"	1219	1829				9.52 885.00			12.70 1134.00						

(1) Esta dimensión según opción del fabricante puede ser 29 mm.